

## Data Sheet EKO50073

<b>Product:</b>	Double SO Schuko screwless
<b>E-number NO:</b>	15 510 12
<b>E-number SV:</b>	18 400 89
<b>E-number FI:</b>	25 043 15
<b>EAN:</b>	7020160500731
<b>Packing:</b>	5
<b>Color:</b>	Pure white




### Product description:

It's a ELKO One double Schuko socket-outlet with semi-flush full cover plate. It is provided with screwless terminals with the wire entrance on the side. Its Ue rated operational voltage is 250VAC at 50/60 Hz. Its Ie rated operational current is 16A. Claw-kit EKO04848 can be used for additional fixation to the flush wall-box when needed. To be mounted in a 1 or 1.5 module flush cc 60mm wall-box or in 1.5 module surface mounted box for surface installation. The dimensions of the product are (W) 87mm x (H) 109mm x (D) 42mm. It is made of recycled Polycarbonate (PC). The color of the product is pure white (RAL 9003) with matt surface finish. It reaches IP21 degrees of protection with IK08 impact strength.




One range by ELKO is covering Wiring Devices, Stand Alone Electronics and Network Connectivity functions for both flush as well as surface installation. The One range has been developed with sustainability in mind, using recycled plastic, recycled packaging material and Cradle to Cradle certified. Modern and slim design with a smooth matt surface finish that is reflecting the light in a glowing way due to it's shape.

### Dimensions

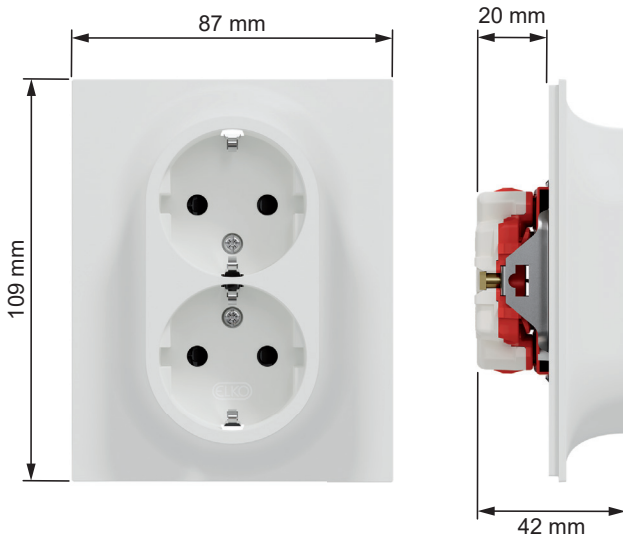

### Installing in flush metal wall-boxes

When installing the screwless double socket outlet in flush metal wall-boxes, the gasket in EKO04066 (NO) or EKO09585 (SE, FI) must be used.

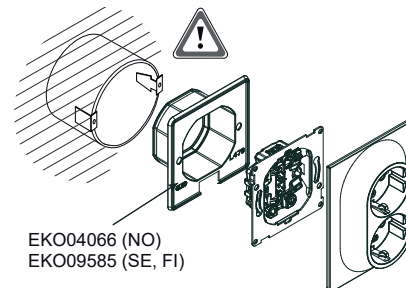

EKO04066 (NO)  
EKO09585 (SE, FI)

#### ⚠️ DANGER

#### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

When installing the screwless double socket outlet in flush metal wall-boxes, the gasket in EKO04066 (NO) or EKO09585 (SE/FI) must be used.

Failure to follow these instructions will result in death or serious injury.