




General characteristics

Reset mode Manual


Mechanical features

Fixing Direct mounting on BF40 - BF94

Dimensions

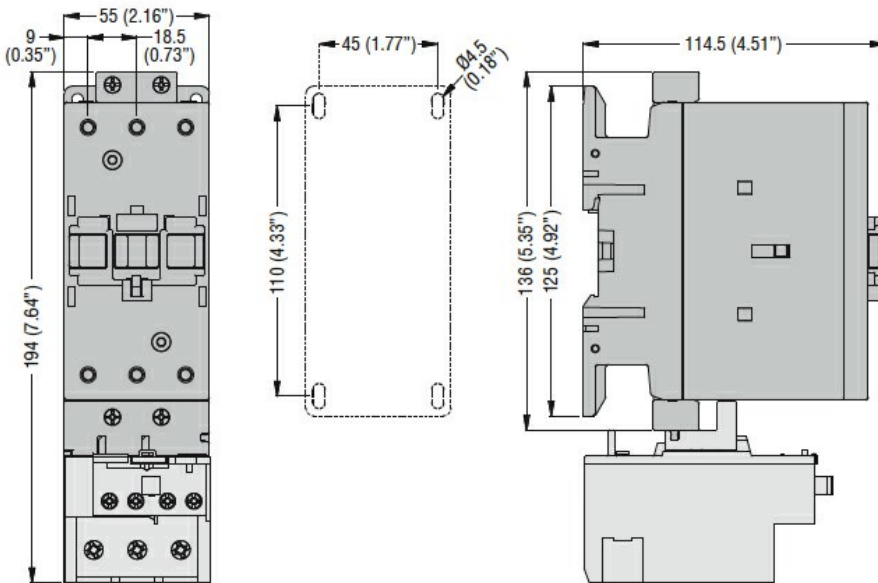

Wiring diagrams

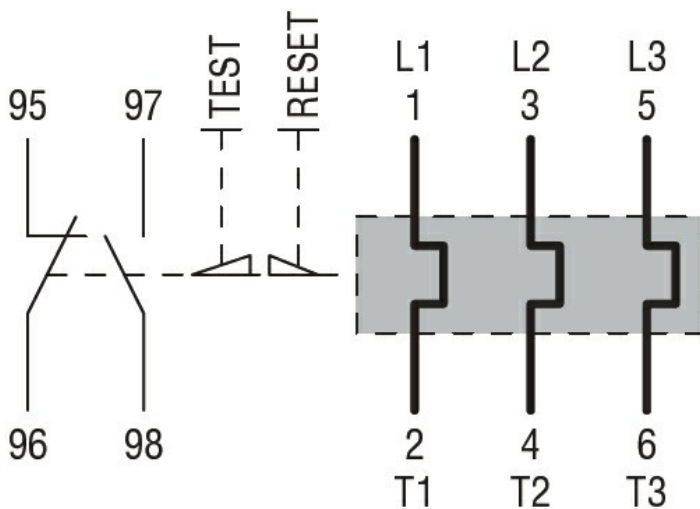

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

MOTOR PROTECTION RELAY, NON PHASE FAILURE / NON SINGLE PHASE SENSITIVE.
THREE POLE (THREE PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BF40 - BF94
CONTACTORS, 70...95A

UL508

Certifications

CCC

cULus

EAC