

## RK 750 V Plastisolert koblingsledning

**RK 750V 16 Blå**

H07V-K

Nexans ref.: 10022612


El. nummer: 1066689 (1050584)

GTIN (EAN 13): 7045210016758

Plastisolert koblingsledning

### Beskrivelse

Koblingsledning med mangetrådet kobberleder. Anbefalt brukt der det er hesiktsmessig å benytte fleksible ledninger, f.eks ved tavlebygging.

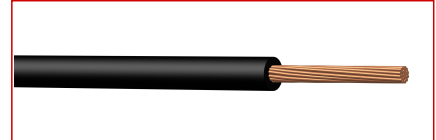

### Standarder

**Internasjonal** EN 50265; HD 21.3;  
IEC 60332-1**Norsk** NEK-HD 21.3Blyfri  
JaNormert spenning i 3 fase systemer U<sub>o</sub>/  
U  
450 / 750 VMax.conductor temp.in service  
70 °CRoHS conform  
Ja

## RK 750 V Plastisolert koblingsledning

**RK 750V 16 Blå**
**Nexans ref.: 10022612**

### Egenskaper

Konstruksjonsegenskaper	
Kappefarge	Blå
Lederform	Mangetrådet
Ledermateriale	Glødd kobber
Isolasjon	Polyvinylklorid - PVC
Blyfri	Ja
Dimensjonsegenskaper	
Lederdiameter	5,3 mm
Nominell ytre diameter	7,3 mm
Antall ledere	1
Ledertverrsnitt	16 mm <sup>2</sup>
Vekt (ca.)	17,0 kg/100m
Elektriske egenskaper	
Normert spenning i 3 fase systemer U <sub>0</sub> /U	450 / 750 V
Bruksegenskaper	
Lengde	100 m
Forpakning	Bunt
Maks. tillatt ledertemperatur	70 °C
RoHS conform	Ja


 Blyfri  
 Ja

 Normert spenning i 3 fase systemer U<sub>0</sub>/  
 U  
 450 / 750 V

 Max. conductor temp.in service  
 70 °C

 RoHS conform  
 Ja